

Network technology

ISbus fieldbus technology Fieldbus power supply

For Zone 2 With diagnostics and adjustable warning level

9412/00-320-11s Art. No. 200588



- To provide Foundation Fieldbus H1 segments (high-power trunk) with a single or redundant power supply
- Output > 28 V, up to 1 A, galvanically separated
- Integrated advanced physical layer diagnostics

MY R. STAHL 9412A



Single or redundant Series 9412 fieldbus power supply units are used to provide an FF H1 high-power trunk with up to 28 V/500 mA, and up to 1 A in Boost mode. In the background, they measure the advanced physical layer parameters, which can be reported via an Android smartphone or via configurable integrated alarms. 9419 bus-Carriers or DIN rails can be used for installation.

Technical Data


Explosion Protection	
Application range (zones)	2
IECEX gas certificate	IECEX BVS 09.0043X
IECEX gas explosion protection	Ex nA nC IIC T4 Gc
ATEX gas certificate	BVS 09 ATEX E 099 X
ATEX gas explosion protection	II 3 G Ex nA nC IIC T4 Gc
FMus certificate	3026646
cFM certificate	3026646C
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; T4, Ta=70 °C Class I, Zone 2, AEx/Ex nA nC IIC T4 , Ta=70 °C See Doc. 9412 6 031 001 1
Certificates	ATEX (BVS), Brazil (ULB), IECEX (BVS), International (FF)
Declaration of Conformity	ATEX (EUK)
Safety Data	
Max. voltage U_0	30.4 V
Max. voltage U_0 note	ic as per EN 60079-11
Electrical Data	
Data interface	Serial, at the front (RS232)
Error message	Overload, short circuit and physical layer values: Trunk voltage/current, signal level, noise, jitter, imbalances
Fieldbus specification	IEC 61158-2, FOUNDATION™ fieldbus H1 FF-831
Output voltage electrical data	≥ 28 V DC
Simplex mode output current	10 to 500 mA
Redundancy mode output current	10 to 500 mA (2x250 mA per 9412)
Boost mode output current	10 mA to 1 A (2x500 mA per 9412)
EOL resistor	Integrated, switchable
Segment overload current	500 to 540 mA
Segment short-circuit current	≤ 0 mA (output disconnected)

ISbus fieldbus technology Fieldbus power supply For Zone 2 With diagnostics and adjustable warning level 9412/00-320-11s Art. No. 200588

Electrical Data

Residual ripple	As per Section 22.6.2 of IEC 61158-2
-----------------	--------------------------------------

Connection diagram 9412

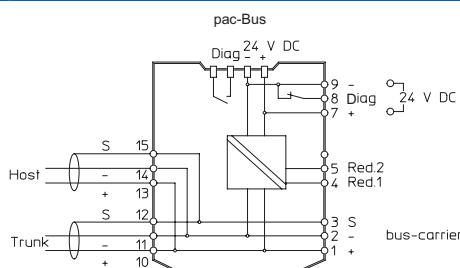

Auxiliary Power

Nominal voltage	24 V DC
Auxiliary power voltage range	18 to 32 V
Current consumption	730 mA @ 24 V
Max. power dissipation	3.35 W
Max. power dissipation note	At 500 mA output current and 24 V auxiliary power
Polarity reversal protection	Yes
Undervoltage monitoring	< 18 V

Device Specific Data

Error messaging device	Relay contact (30 V DC/100 mA),
LED operating conditions	"RUN" LED, green
LED error indication	"ERR" LED, red
Error detection	Overload Short circuit Physical layer values
LED segment	"SEG" LED, yellow
LED terminator	"TERM" LED, yellow
Signal quality level setting	"SIGNAL QUALITY" rotary switch
LED signal quality segment	"OK" LED, green "WARNING" LED, yellow "BAD" LED, red
TERM DIP switch	ON OFF
BOOST DIP switch	ON OFF
Physical layer values	Trunk voltage/current Signal level Noise Jitter Imbalances
Segment overload detection	> 500 mA (output active)
Segment short-circuit detection	>540 mA (output disconnected)

Ambient Conditions

Ambient temperature	-20 °C ... +70 °C
Ambient temperature	-4 °F ... +158 °F
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	95% (without condensation)

Network technology



ISbus fieldbus technology Fieldbus power supply

For Zone 2 With diagnostics and adjustable warning level

9412/00-320-11s Art. No. 200588

Ambient Conditions

Max. operating altitude	< 2000 m
Max. operating altitude, ft	< 6562 ft
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326 (IEC/EN 61000-4-1 to 61000-4-6 and 61000-4-11; EN 55022 class B), NAMUR NE21


Mechanical Data

Rigid single-wire connection	0.2 to 2.5 mm ²
Flexible single-wire connection	0.2 to 2.5 mm ²
Flexible single-wire connection with sleeve	0.25 to 2.5 mm ²
Two-core connection, flexible	0.2 to 1.5 mm ²
Two-core connection, rigid	0.2 to 1 mm ²
Two-core connection, flexible with sleeve	0.25 to 1 mm ²
Degree of protection (IP) (IEC 60529)	IP30 enclosure IP20 terminals
Module enclosure	PA 6.6
Fire resistance (UL 94)	V0
Width	17.6 mm
Width, inches	0.69 in
Length	108 mm
Length, inches	4.25 in
Depth of cut-out	114.5 mm
Mounting depth, inches	4.51 in
Weight	135 g
Weight	0.3 lb

Mounting / Installation

Mounting type	on NS 35/15 DIN rail (DIN EN 60715) In pac-Bus 9194 Or bus-Carrier 9419
Mounting orientation	Horizontal Vertical
Connection type	Screw terminal

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

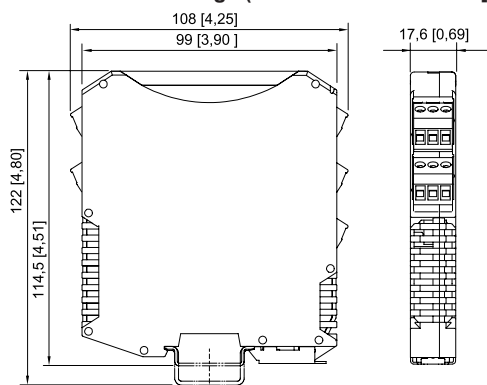








ISpac Series 9143, 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

Network technology

ISbus fieldbus technology Fieldbus power supply
 For Zone 2 With diagnostics and adjustable warning level
 9412/00-320-11s Art. No. 200588



Accessories

Yokogawa bus-Carrier		Art. No.
	Yokogawa bus-Carrier for four segments, redundant	221455
	Yokogawa bus-Carrier for eight segments, simplex	221454
	Yokogawa bus-Carrier for eight segments, redundant	221456
bus-Carrier		Art. No.
	bus-Carrier for four segments, redundant	208746
	bus-Carrier for eight segments, simplex	208745
	bus-Carrier for eight segments, redundant	208747
bus-Carrier for linking device		Art. No.
	bus-Carrier for linking device for four segments, simplex	250240
	bus-Carrier for linking device for four segments, redundant	250241
	bus-Carrier for linking device for eight segments, simplex	250242
pac-Bus		Art. No.
	Wiring auxiliary power and collective error message	160731

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.