



Certificate of Compliance

Certificate: 70220252

Master Contract: 258554

Project: 80083773

Date Issued: 2021-12-08

Issued To: i.Safe MOBILE GmbH
i Park Tauberfranken 10
Lauda-Koenigshofen, Baden-Württemberg, 97922
Germany

Attention: Dirk Amann

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US' for Canada and US or with adjacent indicator 'US' for US only or without either indicator for Canada only.

Issued by: Sorin Tat
Sorin Tat



PRODUCTS

CLASS - C225803 - PROCESS CONTROL EQUIPMENT - Intrinsically Safe and Non Incendive Systems - For Hazardous Locations

CLASS - C225883 - PROCESS CONTROL EQUIPMENT-Intrinsically Safe and Non-Incendive Systems-For Hazardous Locations-Certified to U.S. Standards

Class I Div 2 Groups A, B, C, D, T4

Class II Div 2 Groups F, G, T135°C

Class III Div 2

Model IS530.2 Intrinsically safe and multifunctional industrial smartphone, powered by a rechargeable 3.8V, 3.6Ah, 13.68Wh battery pack (BPIS530.2) made by i.safe MOBILE GmbH. Temperature code T4 for gas and T135°C for dust.



Certificate: 70220252
Project: 80083773

Master Contract: 258554
Date Issued: 2021-12-08

Ambient: -20°C to +60°C for operating and +5°C to +35°C for charging, with entity parameters for the ISM interface connection as specified in document 1029AD04 .Enclosure rating :IP64

Conditions of Acceptability:

- The battery shall only be charged outside the explosion hazardous areas only and using a suitably certified Class 2 power supply with the following output parameters: V = 5VDC I = 2000mA
- The smartphone must be protected against excessive UV light emission and high electrostatic processes.
- The USB interface (type C) located at the bottom side is for data transmission and it is used in non hazardous areas. It is not permitted to open the USB interface cover in hazardous locations.
- The ISM interface of the IS530.2 located at the right side can be used within hazardous areas with approved headsets, Remote Speaker Microphones(RSM) and add-ons.
- For the ISM interface connection the intrinsically safe approved accessories must comply with entity parameters according to document 1029AD04 i.e. Headset IS-HS1.1 and IS-HS1.2 are approved to be used on ISM interface when securely attached to the ISM interface. If the ISM interface is not used, it must be securely closed by the cover provided for this purpose.

Optional accessories:

Class I Div 2 Groups A, B, C, D, T4
Class II Div 2 Groups F, G , T135°C
Class III Div 2

-Model IS-TH1xx.2 Trigger Handle Barcode Scanner connected by cable to the IS530.2 smartphone via the ISM interface connection with the connection parameters in accordance with the document 1029AD04. Ambient: - 20°C to +60°C. Ingress protection: IP64

Scan engine variants of IS-TH1xx.2	
IS-TH1SR.2	Standard range Scan Engine Zebra SE 4750SR
IS-TH1MR.2	Mid range Scan Engine Zebra SE 4750MR
IS-TH1ER.2	Extended range Scan Engine Zebra SE 4850ER

Conditions of Acceptability:

- The Barcode Scanner IS-TH1xx.2 must be protected from impacts with high impact energy, against excessive UV light emission and high electrostatic charge processes.
- The 13-Pin connector of the IS-TH1xx.2 may only be assembled or disassembled from the ISM interface outside hazardous areas.
- The 2 pin charging contacts of the IS-TH1xx.2 should only be used in non-hazardous locations



Certificate: 70220252
Project: 80083773

Master Contract: 258554
Date Issued: 2021-12-08

APPLICABLE REQUIREMENTS

CSA C22.2 No.213-17/UL 121201 9 th Ed.	Nonincendive electrical equipment for use in Class I and II, Division 2 and Class III, Divisions 1 and 2 hazardous (classified) locations
CAN/CSA-C22.2 No. 60079-28:16	Explosive Atmospheres - Part 28: Equipment – Protection of Equipment and transmission systems using optical radiation
ANSI/UL 60079-28:2017	Explosive Atmospheres - Part 28: Equipment – Protection of Equipment and transmission systems using optical radiation

ORDINARY LOCATIONS APPLICABLE REQUIREMENTS (Addressed in CSA Ordloc report No. 70220249):

CAN/CSA-C22.2 No. 62368-1:14	Audio/Video, Information and Communication Technology Equipment – Part 1:Safety Requirements
ANSI/UL 62368-1 2 nd Ed.	Audio/Video, Information and Communication Technology Equipment – Part 1:Safety Requirements

MARKINGS

The manufacturer is required to apply the following markings:

- Products shall be marked with the markings specified by the particular product standard.
- Products certified for Canada shall have all Caution and Warning markings in both English and French.

Additional bilingual markings not covered by the product standard(s) may be required by the Authorities Having Jurisdiction. It is the responsibility of the manufacturer to provide and apply these additional markings, where applicable, in accordance with the requirements of those authorities.

The products listed are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US' for Canada and US (indicating that products have been manufactured to the requirements of both Canadian and U.S. Standards) or with adjacent indicator 'US' for US only or without either indicator for Canada only.

In addition to the above markings, the label shall contain:


- CSA Monogram with “C-US” indicator
- Company name and/or Master Contract number
- Date code of manufacture and a serial number
- Hazardous locations designation :
Class I Div 2 Groups A, B, C, D, T4
Class II Div 2 Groups F, G, T135°C
Class III Div 2
- Temperature code rating

Certificate: 70220252
Project: 80083773


Master Contract: 258554
Date Issued: 2021-12-08

- Ambient Temperature Range
- The certificate number “CSA19CA70220252”
- The words “Intrinsically Safe” in English and in French
- The following warnings in English and French:
 - Warning: Read and understand the manual before operating!
 - Warning: Do not charge or open in Ex-hazardous areas!

Copy the nameplate:

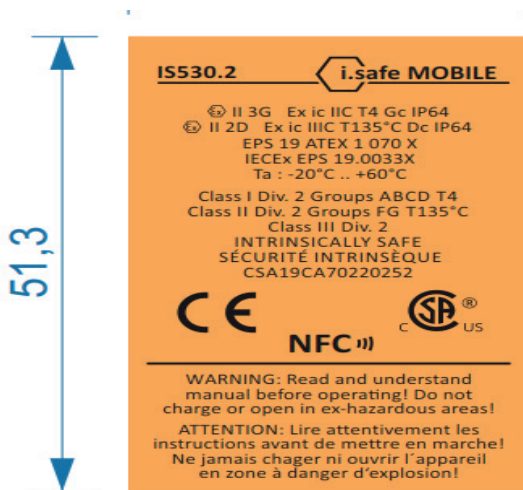

Copy the battery nameplate:

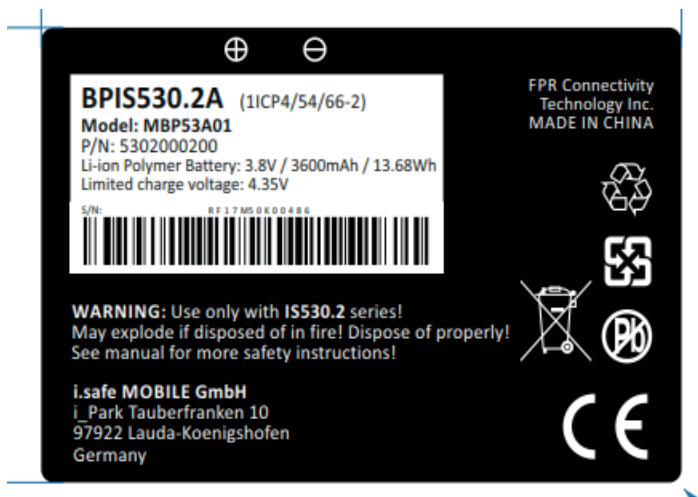

For Optional accessories:



Certificate: 70220252
Project: 80083773

Master Contract: 258554
Date Issued: 2021-12-08

The following marking details appear on the IS-TH1xx.2 model, on a label made from Polycarbonat, back printed, glued with self adhesive 3M 9471 or 3M 467MP or 3M 9448:

- CSA Monogram with “C-US” indicator
- Company name and/or Master Contract number
- Date code of manufacture and a serial number
- Hazardous locations designation :
Class I Div 2 Groups A, B, C, D, T4
Class II Div 2 Groups F, G , T135°C
Class III Div 2
- Temperature code rating
- Ambient Temperature Range
- The certificate number “CSA21CA80083773X”
- The words “Intrinsically Safe” in English and in French
- The following warnings in English and French:
 - o Warning: Read and understand the manual before operating!
 - o Warning: Do not charge or open in Ex-hazardous areas!




Certificate: 70220252
Project: 80083773

Master Contract: 258554
Date Issued: 2021-12-08




Notes:

Products certified under Class C225803, C225883 have been certified under CSA's ISO/IEC 17065 accreditation with the Standards Council of Canada (SCC). www.scc.ca



Products certified under Class C225803, C225883 have been certified under CSA's ISO/IEC 17065 accreditation with the Standards Council of Canada (SCC). www.scc.ca





Supplement to Certificate of Compliance

Certificate: 70220252

Master Contract: 258554

*The products listed, including the latest revision described below,
are eligible to be marked in accordance with the referenced Certificate.*

Product Certification History

Project	Date	Description
80083773	2021-12-08	Update of cCSAus report # 70220252 for intrinsically safe Model IS530.2 multifunctional industrial smartphone for addition of an intrinsically safe and optical isolation protected Barcode Scanner accessory with scan engines IS-TH1SR.2, IS-TH1MR.2, and IS-TH1ER.2.
70220252	2019-12-06	Original Hazardous Locations certificate of the IS530.2 device based on an IECEx report for the following markings: Class I Div 2 Groups A, B, C, D, T4; Class II Div 2 Groups F, G