

8008/2-606 Art. No. 128624



- 2-, 3- or 4-pole control switch: 3-pole load disconnect switch with one auxiliary contact
- Suitable for EMERGENCY STOP functions (according to IEC/ EN 60204, DIN VDE 0113)
- Latching and spring return positions possible

### MY R. STAHL 8008A



R. STAHL Series 8008 control switches are available as 2-, 3- or 4-pole control switches or 3-pole load disconnect switches with one auxiliary contact. Their positive opening NC contacts also make them suitable for EMERGENCY STOP functions. You can choose the switching function and perform it in the latching or spring return position.

## Technical Data

### Explosion Protection

|                                |                                                                                                  |
|--------------------------------|--------------------------------------------------------------------------------------------------|
| Application range (zones)      | 1, 2                                                                                             |
| IECEX gas certificate          | IECEX PTB 06.0010 U                                                                              |
| IECEX gas certificate          | IECEX PTB 06.0010 U                                                                              |
| IECEX gas explosion protection | Ex db eb IIC T6                                                                                  |
| IECEX firedamp certificate     | IECEX PTB 06.0010U                                                                               |
| ATEX gas certificate           | PTB 00 ATEX 1111U                                                                                |
| ATEX gas certificate           | PTB 00 ATEX 1111U                                                                                |
| ATEX gas explosion protection  | Ex II 2 G Ex db eb IIC T6                                                                        |
| Marking ULus                   | Class I, Zone 1 AEx db eb IIC T6 Gb<br>Class I, Div. 2, Groups A,B,C,D                           |
| Marking cUL                    | Class I, Zone 1 Ex db eb IIC T6 Gb<br>Class I, Div. 2, Groups A,B,C,D                            |
| Certificates                   | ATEX (PTB), Brazil (ULB), Canada / USA (UL), Canada (UL), China (CQST), IECEX (PTB), Korea (KTL) |

### Electrical Data

|                                  |       |
|----------------------------------|-------|
| Rated operational voltage AC     | 690 V |
| Rated operational voltage AC UL  | 600 V |
| Rated operational current for AC | 16 A  |
| Rated operational current UL     | 10 A  |
| No. of poles                     | 4     |
| Switching angle                  | 45 °  |

### Ambient Conditions

|                     |                   |
|---------------------|-------------------|
| Ambient temperature | -50 °C ... +60 °C |
| Ambient temperature | -58 °F            |

### Mechanical Data

|                                       |             |
|---------------------------------------|-------------|
| Degree of protection (IP) (IEC 60529) | IP00        |
| Enclosure material                    | Epoxy resin |

8008/2-606    Art. No. 128624


Mechanical Data

|                                |               |
|--------------------------------|---------------|
| Contact material               | Silver-nickel |
| Connection cross-section       | 2.5 mm²       |
| Number of switching positions  | 5             |
| Assembly for swit. arrangement | 606           |
| Weight                         | 225 g         |
| Weight                         | 0.5 lb        |


Mounting / Installation

|                   |           |
|-------------------|-----------|
| Tightening torque | 1.8 N · m |
|-------------------|-----------|

Technical Drawings – Subject to Alterations



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

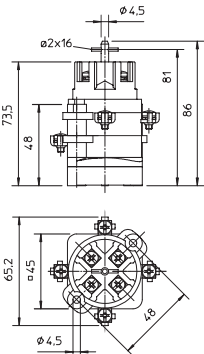

8008/2-6 3- or 4-pole load switch

Accessories

| Rotary actuator, small, lockable |                                                                                       | Art. No. |
|----------------------------------|---------------------------------------------------------------------------------------|----------|
|                                  | Ø39, can be locked with one lock, 45° position<br>with standard seal for up to -20 °C | 227391   |
|                                  | Ø39, can be locked with one lock, 90° position<br>with standard seal for up to -20 °C | 227359   |
|                                  | Diameter 39 mm, lockable using 1 lock, 45° position<br>Seal: Silicone, up to -60 °    | 227392   |

8008/2-606    Art. No. 128624

| Rotary actuator, small, lockable<br>ASSY734                                      |                                                                                    | Art. No. |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------|
|  | Diameter 39 mm, lockable using 1 lock, 90° position<br>Seal: Silicone, up to -60 ° | 227360   |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.