

Applications of low-voltage systems

STAHL

Battery box

(can only be ordered with connection enclosure)

8316/22-24-0600-1 Art. No. 143968



- Safe: Extremely low gas emissions, effectively sealed to retain electrolyte, leakproof, no acid coating
- Buffer for irregular charging
- Reliable persistent current output, long service life and maintenance-free

MY R. STAHL 8316A



R. STAHL Series 8316 battery box also provides a reliable back-up power supply during continuous operation in hazardous areas. It can be handled cleanly and safely since the gases generated during charging are recombined to form water in the closed battery system. Thanks to minimal self-discharge and protection against total discharge, the battery has a stable cycle, is maintenance-free and has a long service life.

Technical Data

Explosion Protection

Application range (zones)	1, 2
IECEX gas certificate	IECEX DEK 20.0019
IECEX gas explosion protection	Ex eb IIC T5/T6 Gb
ATEX gas certificate	DEKRA 20ATEX0002
ATEX gas explosion protection	Ex II 2 G Ex eb IIC T5/T6 Gb
Certificates	ATEX (DEK)

Electrical Data

DC rated operational voltage	24 V
Short-circuit current (IEC/EN896-2)	936 A
Rated current backup fuse	63 A
Tripping characteristic	gG
Conduction current	6 A
Capacity	60 Ah at 20 °C
Charging voltage	27.6 V
Discharge current	3 A at 20 °C
Max. discharge current	400 A
Max. load condition	400 A

Ambient Conditions

Ambient temperature T5	-20 °C ... 55 °C
Ambient temperature T6	-20 °C ... 40 °C
Charging temperature	0 °C ... 40 °C

Mechanical Data

Degree of protection IP (IEC 60529)	IP23
Enclosure material	Polyester, Glass fibre reinforced
Min. connection cross-section, finely stranded	35 mm ²

Applications of low-voltage systems



Battery box

(can only be ordered with connection enclosure)

8316/22-24-0600-1 Art. No. 143968


Mechanical Data

Width	340.5 mm
Width, inches	13.406 in
Height	247 mm
Height in inches	9.7244 in
Length	682 mm
Length in inches	26.85 in
Weight	-

Components


Number of batteries	2
---------------------	---

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

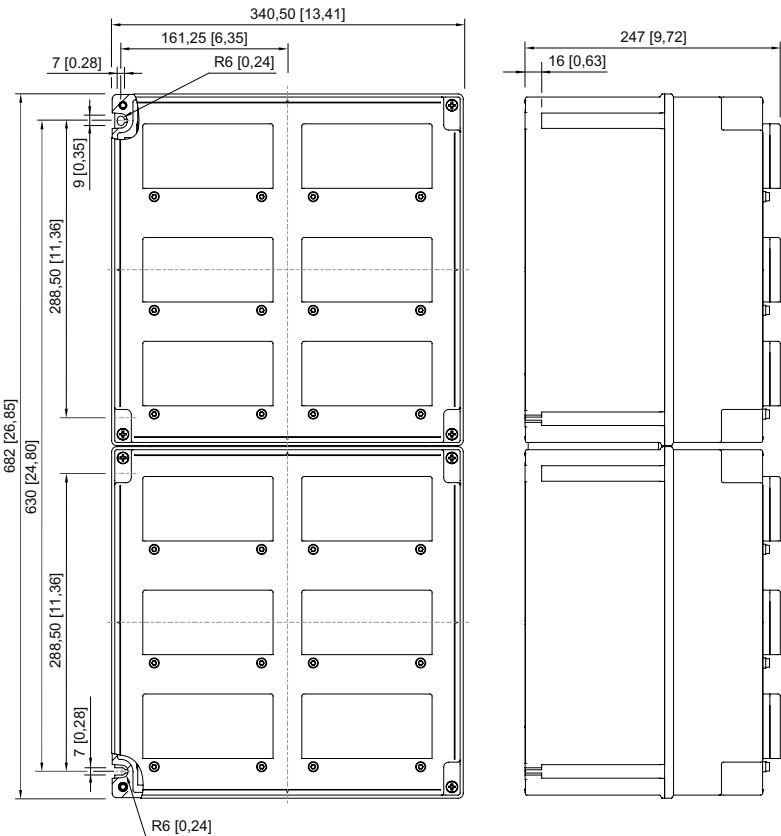

Enclosure 8146/5000
for battery box 8316/22-24-0250-1
for battery box 8316/22-24-0400-1
for battery box 8316/22-24-0600-1

Spare Parts

Battery		Art. No.
	Sonnenschein dryfit A512/60A 12 V, 60 Ah	125075

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.