

# Installation equipment

30 A plug

Plug

8571/22-405-S-XX-X-XX-XXX Art. No. 294405



- Different voltage ranges according to EN 60309
- No impact of torsional forces from the wire on the seal
- Large temperature range of use
- High mechanical impact and shock resistance
- Perfect protection against penetration of liquids and dusts
- 3D data for download on the website
- Protective cap included in delivery

MY R. STAHL 8571V



R. STAHL Series 8571/22 SolConeX plugs are 4- or 5-pole 20 A plugs that are classified for the zone or division according to NEC 505. The floating pins allow them to be inserted and removed simply and easily. The pivoting strain relief makes it easier to install the cable. Self-cleaning and corrosion-free plug pins made from high-quality materials ensure optimum electrical contact. A protective cap ensures that the plug pins are optimally protected against dirt when not plugged in.

## Technical Data

### Explosion Protection

Area of application	European Union (ATEX) Canada IECEX USA
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 20.0003X
IECEX gas certificate	IECEX PTB 20.0003X
IECEX gas explosion protection	Ex eb IIC T6 ... T5 Gb
IECEX dust certificate	IECEX PTB 20.0003X
IECEX dust explosion protection	Ex tb IIIC T81 °C Db
ATEX gas certificate	PTB 20 ATEX 1003 X
ATEX gas certificate	PTB 20 ATEX 1003 X
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC T6 ... T5 Gb
ATEX dust certificate	PTB 20 ATEX 1003 X
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T81 °C Db
FMus certificate	FM21US0071X
cFM certificate	FM21CA0046X
Marking FMus	Class I, Div. 2, Groups A,B,C,D; Class II, III, Div. 1, Groups E,F,G, Enclosure Type 3, 4, 4X Class I, Zone 1, AEx eb IIC T6 ... T5 Gb; Zone 21, AEx tb IIIC T81 °C Db
Marking cFM	Ex eb IIC Gb; Class I, Div. 2, Groups A,B,C,D; Class II, III, Div. 1, Groups E,F,G, Enclosure Type 3, 4, 4X Ex tb IIIC T81 °C Db

# Installation equipment

30 A plug

Plug

8571/22-405-S-XX-X-XX-XXX Art. No. 294405



## Explosion Protection

Certificates	ATEX (PTB), Brazil (ULB), Canada (FM), IECEx (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (FM)
Ship approval	DNV

## Electrical Data

Rated operational voltage	600 V AC
Rated operational current	30 A
Rated operational current	30 A
Mechanical service life	> 5x10 <sup>3</sup> mating cycles
Type of voltage	Low voltage
Frequency range	50 / 60 Hz

## Ambient Conditions

Ambient temperature	-50 °C to +65 °C
Ambient temperature	-58 °F to +149 °F
Ambient temperature note	For further information, see the operating instructions.

## Mechanical Data

IP degree of protection (IEC 60529)	IP66
IP degree of protection (IEC 60079)	IP64
Enclosure type (NEMA250)	3, 4, 4X
Enclosure material	Polyamide, Glass fibre reinforced
Silicone-free	No
Finely stranded connection cross-section	1 x 2.5 mm <sup>2</sup> ... 1 x 10 mm <sup>2</sup>
Finely stranded connection cross-section AWG	1 x AWG 14 ... 1 x AWG 8
Width, inches	3.9 in
Height in inches	3.9 in
Length	204 mm
Length in inches	8.03 in
Impact strength (IEC 60079)	7 J
Impact strength (IEC 62262)	IK10
Colour code	Black
Coding (clock hour position)	5
Series	SolConeX
Detailed number of poles	3-pole, 4 conductors
Detailed pole number 2	3 P + PE
Weight	500 g
Weight	1.1 lb

## Mounting / Installation

Connection	Screw terminal
------------	----------------

## Components

Cable diameter	13 – 25 mm
Cable diameter inch	0.51 – 0.98 in

# Installation equipment


30 A plug

Plug

8571/22-405-S-XX-X-XX-XXX Art. No. 294405




## Technical Drawings – Subject to Alterations



Position of clock hour position

Example: 6 h position

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

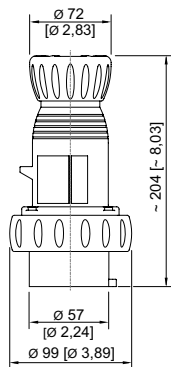


4-pole plug

## Accessories

### Protective cap for Series 8571 plug

Art. No.



4-pole

150856

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.