

8265/63-0000 Art. No. 165779



- Six basic enclosure sizes, optional inspection windows
- International certification, wide temperature range, seawater-resistant light-metal enclosure
- Empty enclosure
- Custom entries available upon request
- For use in Class I, Div. 1 & 2

### MY R. STAHL 8265K



R. STAHL series 8265 are explosionproof and dust-ignitionproof empty enclosures globally certified. The large cover opening allows easier access for mounting and maintenance of components within the enclosure. The cover is also available with a window. R. STAHL can install various equipment in the enclosure including arc and sparking components according to customer requirements. Check with your R. STAHL representative to see if your specified equipment can be mounted in the enclosure.

## Technical Data

### Explosion Protection

Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 07.0027 U
IECEX gas explosion protection	Ex db eb IIC Gb
IECEX dust certificate	IECEX PTB 07.0027 U
IECEX dust explosion protection	Ex tb IIIC Db
ATEX gas certificate	PTB 06 ATEX 1023 U
ATEX gas explosion protection	Ex II 2 G Ex db eb IIC Gb
ATEX dust certificate	PTB 06 ATEX 1023 U
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC Db
Certificate ULus	E307783
Marking ULus	Class I, Div. 1, Groups A,B,C,D Class II,III, Div. 1, E, F, G Class I, Zone 1, Group IIC Enclosure Type 3, 4, 4X
Certificate cUL	E307783
Marking cUL	Class I, Zone 1, Group IIC Class I, Div. 1, Groups A,B,C,D Class II,III, Div. 1, E, F, G Enclosure Type 3, 4, 4X
Marking Notes	also for installation in Class I, II & III, Div. 2
Certificates	ATEX (PTB), Canada / USA (UL), Canada (UL), IECEX (PTB), USA (UL)

### Ambient Conditions

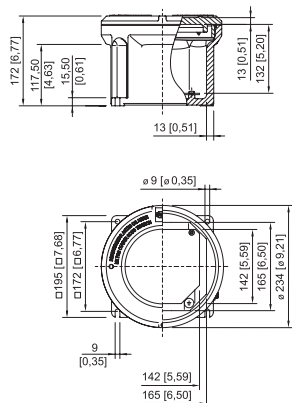
Ambient temperature	-50 °C ... +50 °C
Ambient temperature	-58 °F ... +122 °F

8265/63-0000 Art. No. 165779

### Mechanical Data

Degree of protection (IP)	IP54
Degree of protection note	IP66 with O-ring silicone
Enclosure type (NEMA250)	3, 4, 4X
Enclosure material	Aluminium, copper-free, Seawater-resistant
Enclosure colour	without
Clamping range max.	95 mm <sup>2</sup>
Cover	Closed
Design	Without entry
Width	195 mm
Width in inches	7.68 in
Height	172 mm
Height, inches	6.77 in
Length	195 mm
Length, inches	7.68 in
Diameter	234 mm
Diameter inch	9.21 in
Enclosure size	3
Weight	6.58 kg
Weight	14.51 lb


### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




Enclosure size 3 without inspection window

### Accessories



#### Cover without sight glass

		Art. No.
	Enclosure: 8265/.3-0000	143470

#### Mounting rail

		Art. No.
	G32 length: 133 mm [5.24 in] for enclosure size 3	137939

8265/63-0000 Art. No. 165779

	TS35 length: 133 mm [5.24 in] for enclosure size 3	137970
	TS15 length: 133 mm [5.24 in] for enclosure size 3	137902


**Mounting plate**

**Art. No.**

	for enclosure size 3 M5 x 8 screws are included.	316169
--	---	--------


**Threaded pin**

**Art. No.**

	M5x16-A2 with allen screw and point	110216
--	-------------------------------------	--------

**Box spanner**


**Art. No.**

	to open the enclosure cover for size 1, 2, 3, 4 2 box spanner are required	142059
--	---	--------

**Spare Parts**

**O-ring**

**Art. No.**

	silicone, for enclosure size 3	305500
--	--------------------------------	--------

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.