

## Small fuse element

0.400 A

8560/51-4133 Art. No. 213081



- Cost-effective miniature fuse for control circuits
- Disconnect characteristics: Fast-acting, medium time lag, and slow-acting
- Terminal cover with finger protection: IP20

MY R. STAHL 8560A



The R. STAHL Series 8560 small fuse element is a cost-effective miniature fuse for control circuits. It is designed for rated operational voltages up to 250 V and rated operational currents up to 6.3 A and is available with various disconnect characteristics. It is snapped onto normal rails (TS 15, 35, 32). The terminal cover with finger protection meets the specifications of the IP20 degree of protection.

## Technical Data

### Explosion Protection

Area of application	European Union (ATEX) CE Code IECEX
Application range (zones)	1, 2
IECEX gas certificate	IECEX PTB 06.0056U
IECEX gas explosion protection	Ex eb mb IIC T4 ... T6 Gb
ATEX gas certificate	PTB 99 ATEX 2158 U
ATEX gas explosion protection	Ⓔ II 2 G Ex eb mb IIC T4 ... T6 Gb
Certificate cUL	E182378V1S6
Marking cUL	Class I, Zone 1, Ex e m II T6...T4 Class I, Div. 2, Groups A,B,C,D, T6...T4
Certificates	ATEX (PTB), Brazil (ULB), Canada (UL), IECEX (PTB)
Notes	Product label may vary. Series devices are labelled with ATEX, IECEX and CE Code.

### Electrical Data

Rated operational voltage AC	250 V
Rated operational current	0.4 A
Rated breaking capacity max	35 A
Characteristic	Fast-acting

### Ambient Conditions

Ambient temperature	-50 °C ... +70 °C (T4) -50 °C ... +70 °C (T5) -50 °C ... +56 °C (T6)
Ambient temperature	-58 °F ... +158 °F (T4) -58 °F ... +158 °F (T5) -58 °F ... +132 °F (T6)
Storage temperature	-25 °C ... +70 °C
Storage temperature	-13 °F ... +158 °F

# Components for system solutions

## Small fuse element

0.400 A

8560/51-4133 Art. No. 213081



### Mechanical Data

Degree of protection (IP)	IP20
Enclosure material	Polyamide
Connection cross section	0.75 ... 2.5 mm <sup>2</sup>
Connection cross-section AWG	20 AWG ... 14 AWG
Type of connection cable	Finely stranded Stranded
Width	18.5 mm
Width, inches	0.73 in
Height	40 mm
Height in inches	1.58 in
Length	46 mm
Length in inches	1.81 in
Packaging unit	5
Weight	240 g
Weight	0.53 lb
Note	The fuse can be snapped onto the mounting rails listed below: DIN rail TS 15 (according to DIN EN 60715) DIN rail TS 35 x 7.5 (according to DIN EN 60715) G-rail TS 32 (according to DIN EN 60715) The fuse may only be replaced when the system is de-energised.

### Mounting / Installation

Tightening torque	1.2 N · m
Tightening torque lbf in	10.62 lbf in

## Small fuse element

0.400 A


8560/51-4133 Art. No. 213081

### Technical Drawings – Subject to Alterations



8560/51-...3.250 V, fast-acting

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

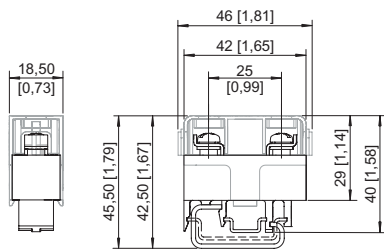

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.