

8510/131-30-300-030 Art. No. 213111



- Constant power supply for control circuits
- Protected against sustained short-circuit current, overload and idle running
- Corrosion-resistant enclosure material

MY R. STAHL 8510Y



The R. STAHL Series 8510 power supply provides a constant power supply for control circuits. It is protected against sustained short-circuit current, overload and idle running and is therefore extremely reliable in operation. It can be screwed into Ex e enclosures so that it is protected against vibrations, while easily accessible connection terminals simplify installation.

Technical Data

Explosion Protection

Application range (zones)	1, 2
IECEX gas certificate	IECEX BVS 07.0029U
IECEX gas explosion protection	Ex de IIC
IECEX firedamp certificate	IECEX BVS 07.0029U
IECEX firedamp protection	Ex de I
ATEX gas certificate	DMT 00 ATEX E 073 U
ATEX gas explosion protection	Ex II 2 G Ex de IIC
ATEX firedamp certificate	DMT 00 ATEX E 073 U
ATEX firedamp protection	Ex I M2 Ex de I
Certificates	Brazil (ULB), China (CQST), IECEX (BVS)

Electrical Data

Input voltage	100 to 240 V AC
Input current	0.7 to 0.5 A
Output current	1.3 A
Frequency Hz (for AC)	60 50

Output

Output voltage	24 V DC
----------------	---------

Ambient Conditions

Ambient temperature	-20 °C ... +60 °C
---------------------	-------------------

Mechanical Data


Degree of protection (IP)	IP20
Enclosure material	Epoxy resin
Min. connection terminals	1.5 mm ²
Max. solid connection terminals	10 mm ²
Max. finely stranded connection terminals	6 mm ²

8510/131-30-300-030 Art. No. 213111


Mechanical Data

Type of connection cable	Solid Finely stranded
Width	115 mm
Height	130 mm
Depth	110.5 mm
Weight	2.6 kg
Weight	5.73 lb

Technical Drawings – Subject to Alterations



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

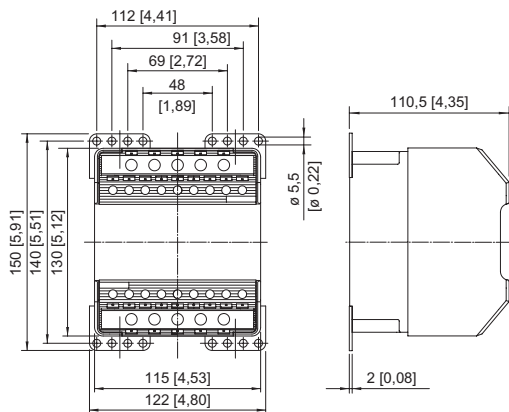

8510/131

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.