

## Remote I/O

IS1 RIO standard enclosure Zone 1 With shield bus

With cable duct and power terminals

8150/5-0760-0760-300-2321 Art. No. 244144



- Short delivery times
- Can be used in Zone 1 without acceptance testing or certification
- For 24 V DC and 120/230 V AC
- Ready for use, prefabricated with entries, BusRails, connection terminals, etc.
- Modifications, extensions and customer-specific adaptations are possible

WebCode 8150D



With the IS1+ standard enclosures for Zone 1, we offer you a variety of prefabricated field enclosures made from 1.4301 stainless steel (V2A). They include all entries, BusRails, cable ducts, CPM sockets and connection terminals for auxiliary power.

Once the IS1+ components (available separately) have been installed, the enclosures can be used in Zone 1 without acceptance testing, and they fulfil the requirements of EN 61439.

## Technical Data

### Explosion Protection

Application range (zones)	1 2
IECEX gas certificate	IECEX PTB 09.0049
IECEX gas explosion protection	Ex db eb ib [ia Ga, ib] IIC T4 Gb
ATEX gas certificate	PTB 09 ATEX 1109
ATEX gas explosion protection	Ex II 2 (1) G Ex db eb ib [ia Ga, ib] IIC T4 Gb
Certificates	ATEX (PTB), IECEX (PTB), India (PESO)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	Zone 1
Further information	See the operating instructions and certificates for the enclosures and IS1+ modules

### Electrical Data

Applicable IS1+ CPM modules	9440/22-01-*1-C1243 (PROFIBUS DP V1 HART); 9440/22-01-*1-C1455 (PROFIBUS DP V1 HART for PNO redundancy); 9440/22-01-*1-C1202 (Modbus RTU) *1 = 24 V DC or *2 = 230 V AC
Usable IS1+ I/O modules	9468/32 9470/32 9475/32 9482/32
Applicable IS1+ modules note	The IS1+ modules must be installed according to the corresponding operating instructions for the modules.

### Auxiliary Power

Auxiliary power rated operating voltage	230 V AC (90 to 253 V AC) 24 V DC (20 to 35 V DC)
Auxiliary power nominal current	Max. 2.5 A @ 24 V DC Max. 0.5 A @ 230 V AC
Auxiliary power rated current	Depending on the installed IS1+ modules (see corresponding data sheet)

## Remote I/O

IS1 RIO standard enclosure Zone 1 With shield bus

With cable duct and power terminals

8150/5-0760-0760-300-2321 Art. No. 244144



### Device Specific Data

Max. number of analogue I/O signals	64
Max. number of digital I/O signals	128
Max. internal power dissipation	67 W
IS1+ BusRail	1 x BusRail for 10 slots, with 2 end pieces (beginning + end), 1 BusRail extension
Unused slots	1
Cable duct	2 x Blue (100 x 100 mm); 1 x Grey (25 x 25 mm)
Shield bus	2 x KLBÜ 3...8 2 x AK16 50 x AK4
Front door	1 x opening to the left 5 x cam lock

### Ambient Conditions

Ambient temperature	-20°C ... +55°C
Ambient temperature	-40°F ... +122°F
Storage temperature	-40°C ... +80°C
Storage temperature	-40°F ... +176°F
Note	Also see the technical data of the IS1+ modules in the relevant data sheets

### Mechanical Data

Connection auxiliary power	Screw connector 0.2 to 10 mm <sup>2</sup> (4 x UTTB 4; 2 x UTTB 4-PE)
PE connection version	External M8 PE connection
PE connection clamping range	10 – 25 mm <sup>2</sup>
Degree of protection (IP) (IEC 60529)	IP65
Enclosure material	Stainless steel 1.4301, (V2A, AISI 304) Brush finished
Sealing material	Silicone foam gasket
Silicone-free	No
Wall thickness	2 mm
Connection cross-section	0.2 to 10 mm <sup>2</sup>
Dimensions (WxHxD)	760 x 760 x 300 mm
Width	760 mm
Width, inches	29.92 in
Height	760 mm
Height, inches	29.92 in
Depth	300 mm
Depth, inches	11.81 in
Weight	55 kg
Weight	121.25 lb

### Mounting / Installation

Mounting orientation	Horizontal Vertical
Connection type	Screw connector

### Components

Built-in unit 1	1 x BusRail for 10 slots (1 x CPM, 8 x I/O – modules)
Built-in unit 3	1 x Socket for CPU & pow mod. 9490/11-12

# Remote I/O

IS1 RIO standard enclosure Zone 1 With shield bus

With cable duct and power terminals


8150/5-0760-0760-300-2321 Art. No. 244144



## Components

Auxiliary power cable entries	2 x Black cable gland Polyamide, type 8161/7 M32 Ø 9 ... 21 mm
Cable entries signals	98 x Blue cable gland Polyamide, type 8161/8 M20 Ø 4 ... 13 mm
Breather	1 x Breather, green, Polyamide, type 8162 M25 x 1,5
Type of terminals PE 1	2 x UTTB 4-PE
Earth rail	10 x 3 Zinc galvanised (not insulated) (1x)

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

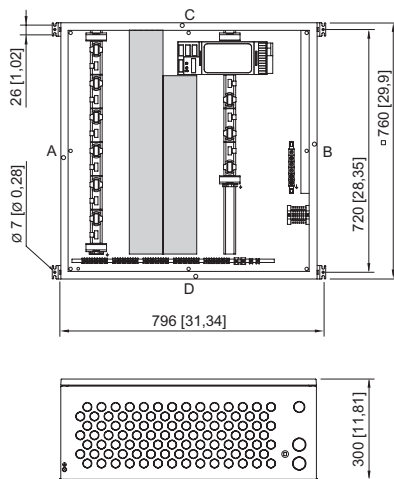

1 x BusRail for 10 slots

Item no. 244144

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.