

# Installation Equipment and Accessories

## Cable gland With RapidEx compound



CMP-25PXSS2KREX Art. No. 246617



- "RapidEx" compound barrier for easy installation and greater reliability
- Sealing for the outer cable sheath provided by an explosion-protected displacement seal
- Worldwide certification in accordance with IECEx, ATEX and cCSAus

MY R. STAHL PXSS2KB



PXSS2K REX series metal Ex d and Ex e barrier cable entries are suitable for unarmoured cables and cables with wire-braid armouring. They are sealed by means of a liquid compound barrier ("RapidEx"), which reduces the amount of time, the costs and the risks involved in installation and affords increased reliability. They feature a displacement seal for the outer cable sheath coupled with a double flood seal with integral protection.

### Technical Data

#### Explosion Protection

Ex version	Ex e & Ex d & Ex nR & Ex ta
Application range (zones)	1 2 20 21 22
IECEX gas certificate	IECEX CML 18.0182X
IECEX gas explosion protection	Ex db IIC Gb
IECEX dust certificate	IECEX CML 18.0182X
IECEX dust explosion protection	Ex ta IIIC Da
IECEX firedamp certificate	IECEX SIM 14.0008 X
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection 2	Ex eb I Mb
IECEX restricted breathing certificate	IECEX CML 18.0182X
IECEX restricted breathing	Ex nR IIC Gc
ATEX gas certificate	CML 18ATEX1325X
ATEX gas explosion protection	Ex II 2 G Ex db IIC Gb
ATEX dust certificate	CML 18ATEX1325X
ATEX dust explosion protection	Ex II 1 D Ex ta IIIC Da
ATEX firedamp certificate	CML 18ATEX1325X
ATEX firedamp protection	Ex I M2 Ex db I Mb
ATEX firedamp protection 2	Ex I M2 Ex eb I Mb
ATEX restricted breathing certificate	CML 18ATEX4317X
ATEX restricted breathing	Ex II 3 G Ex nR IIC Gc
Notes	The product certification and certificates can be downloaded from the manufacturer's homepage ( <a href="http://www.cmp-products.com">www.cmp-products.com</a> )

# Installation Equipment and Accessories

## Cable gland With RapidEx compound



CMP-25PXSS2KREX Art. No. 246617


### Ambient Conditions

Ambient temperature -60 °C ... +85 °C

### Mechanical Data

Version	25
Strain relief	No
Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting in accordance with the specifications of the manufacturer, CMP. The specified degrees of protection are only fulfilled if CMP installation accessories are used.
Degree of protection (IP) UL	IP66
Sealing material	SOLO LSF
Sealing ring material	Viton
Material	Nickel-plated brass
Silicone-free	Yes
Clamping range	11.1 – 20 mm
Armouring type	Unarmoured cable types
Clamping range	11.1 ... 20 mm
Max. number of cores	21
Construction type	BS 6121, IEC/EN 62444
Width across corners	39.6 mm
Width across flats	36 mm
Thread size	NPT3/4
Thread length	20.3 mm
Thread pitch	14 TPI
Thread standard	NPT
Gland size	25
Inner sheath	17.5 mm
Max. internal conduit diameter	17.9 mm
Outer sheath	11.1 ... 20 mm
Protrusion length	60 mm
Impact strength	20 J
PVC boot	PVC09
Lot size	1
Weight	330 g
Weight	0.73 lb

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

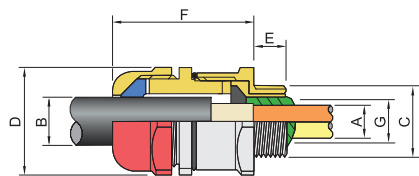

- A = Max. inner sheath
- G = Max. internal conduit diameter
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

# Installation Equipment and Accessories

## Cable gland With RapidEx compound



CMP-25PXSS2KREX Art. No. 246617

---

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.