

CMP-767-D-M5-5 Art. No. 253042



- Ex-d und Ex-e metal stopping plugs
- Large selection of metric thread sizes
- Operating temperature range: -60 °C to +200 °C
- Worldwide certification, IECEX, ATEX, UL and cCSAus

MY R. STAHL 767DA



The metallic Ex-d stopping plugs from the 767 series with a truss head and hexagon socket enable temporary or continuous plugging of unused drilled holes. There is a large selection of different metric thread sizes and types available. They have worldwide certification according to IECEX, ATEX, UL and cCSAus.

Technical Data

Explosion Protection

| | |
|---------------------------------|---|
| Application range (zones) | 1 2 20 21 22 |
| IECEX gas certificate | IECEX SIM 15.0002X |
| IECEX gas explosion protection | Ex db IIC Gb |
| IECEX dust certificate | IECEX CML 18.0177X |
| IECEX dust explosion protection | Ex ta IIIC Da |
| IECEX firedamp certificate | IECEX CML 18.0177X |
| IECEX firedamp protection | Ex db I Mb |
| IECEX firedamp protection 2 | Ex eb I Mb |
| ATEX gas certificate | CML 18ATEX1320X |
| ATEX gas explosion protection | ⊕ II 2 G Ex db IIC Gb |
| ATEX dust certificate | CML 18ATEX1320X |
| ATEX dust explosion protection | ⊕ I 1 D Ex ta IIIC Da |
| ATEX firedamp certificate | CML 18ATEX1320X |
| ATEX firedamp protection | ⊕ I M2 Ex db I Mb |
| ATEX firedamp protection 2 | ⊕ I M2 Ex eb I Mb |
| Notes | The product certification and certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com) |

Ambient Conditions

| | |
|---------------------|--------------------|
| Ambient temperature | -60 °C ... +200 °C |
|---------------------|--------------------|

Mechanical Data


| | |
|------------------------------|---|
| Degree of protection (IP) | IP66 |
| Degree of protection note | IP67 and IP68 mounting in accordance with the specifications of the manufacturer, CMP |
| Degree of protection (IP) UL | IP66 |

CMP-767-D-M5-5 Art. No. 253042

Mechanical Data

| | |
|-----------------------------------|---------------------|
| Material | Nickel-plated brass |
| Silicone-free | Yes |
| Drive | Hexagon socket |
| Width across corners | 46 mm |
| Hexagon socket width across flats | M10 |
| Height | 5.5 mm |
| Outer diameter | 46 mm |
| Thread size | M40 |
| Thread length | 15 mm |
| Thread pitch | 1,5 |
| Packaging unit | 1 |
| Weight | 200 g |
| Weight | 0.44 lb |

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

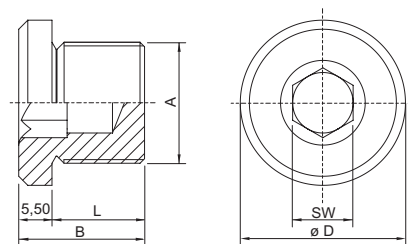

A = Thread size
 B = Length
 L = Thread length
 D = Outer diameter
 SW = Width across flats

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.