

# Control and signalling devices

## LED indicator lamp for panel mounting



8013/322-al Art. No. 269751



- Beneficial LED technology: Extremely long service life, high luminance, low heat build-up
- For installation in enclosure wall, enclosure cover, panels or control cabinets
- Versions with spring clamp terminal with connection chamber or versions with prefabricated connection cable and connection chamber are available

MY R. STAHL 8013B



R. STAHL Series 8013 LED indicator lamps show command statuses via a light signal, the colour of which can be determined using the colour filter included in the delivery: Red, yellow, green, blue or white. The long-lasting LED ensures high luminance and low heat build-up. Versions with spring clamp terminal and versions with prefabricated connection cable and connection chamber are available.

### Technical Data

#### Explosion Protection

Scope of validity	European Union (ATEX) IECEX
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 07.0012 U
IECEX gas explosion protection	Ex db mb ia IIC Gb
ATEX gas certificate	PTB 02 ATEX 2130 U
ATEX gas explosion protection	Ⓔ II 2 G Ex db mb ia IIC Gb
Certificates	ATEX (PTB), China (CQST), IECEX (PTB)
Declaration of Conformity	ATEX (EUK), China (CCC)
Notes	Product label may vary. Series devices are labelled with ATEX and IECEX.

#### Safety Data

Max. capacitance $C_i$	Negligible
Max. inductance $L_i$	Negligible
Max. voltage $U_i$	28 V
Max. current $I_i$	150 mA
Max. power $P_i$	1 W

#### Electrical Data

Rated operational voltage AC	10.8 – 28 V
Rated operational voltage DC	10.8 ... 28 V
AC UL rated operational voltage	28 V
Rated operational current	12 mA
Frequency	0 to 60 Hz
UL rated operational current	0.15 A
Rated operational power	0.6 W

# Control and signalling devices

## LED indicator lamp for panel mounting



8013/322-al Art. No. 269751

### Electrical Data

Electrical service life 10<sup>5</sup> lighting hours

### Lighting Data

Lamp White LED

Luminous colour  
 Blue  
 Green  
 Red  
 White  
 Yellow

### Ambient Conditions

Ambient temperature -30 °C ... +60 °C

Ambient temperature -22 °F ... +140 °F

### Mechanical Data

Version Without connection chamber

Degree of protection (IP) (IEC 60529) Reverse side IP20, front side IP66

Enclosure material Polyamide

Silicone-free Yes

Connection cross-section 0.5 ... 2.5 mm<sup>2</sup>

Connection cross-section AWG 18 AWG ... 12 AWG

Packaging unit 1

Weight 110 g

Weight 0.243 lb




### Mounting / Installation

Tightening torque 1.2 Nm

Tightening torque lbf in 10.62 lbf in

Connection Spring terminal connection

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

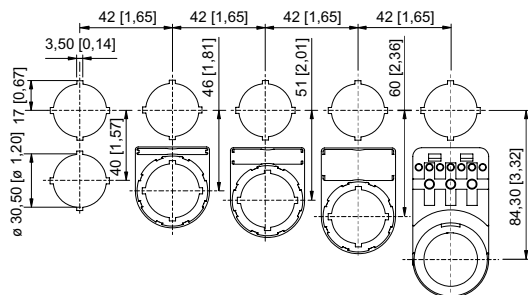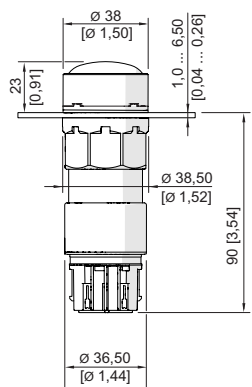

Cut-out with/without additional designation plate

8013/3.2 indicator lamp without connection chamber

## Spare Parts

Lens


Art. No.


# Control and signalling devices




## LED indicator lamp for panel mounting






8013/322-al Art. No. 269751

	red	155842
	yellow	155834
	green	155852
	blue	155860
	white	155824

Closing part		Art. No.
	8602C3-733-B for closing unused holes in cover, dia. 30.5 mm, NBR	244306
	8602C3-733-S for closing unused holes in cover, dia. 30.5 mm, silicone	244307

Insert discs for label holder		Art. No.
	One-line Plain Material: PVC Colour: White Self-adhesive	238271
	Two-line Plain Material: PVC Colour: White Self-adhesive	238272
	Three-line Plain Material: PVC Colour: White Self-adhesive	238273

Label holder		Art. No.
	Label holder, size 1, without insert disc Labelling: 1-line can be installed in dia. 30.5 mm drilled holes for actuators	155632
	Label holder, size 2, without insert disc Labelling: 1- or 2-line can be installed in dia. 30.5 mm drilled holes for actuators	155687
	Label holder, size 3, without insert disc Labelling: 1-, 2- or 3-line can be installed in dia. 30.5 mm drilled holes for actuators	155844

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.