



- For redundant FO network structures (Profibus DP, Modbus RTU) in hazardous areas of Zone 1
- "Ex op is" interface makes for easy installation and maintenance
- With diagnostics function for early error detection and signaling

MY R. STAHL 9186B



The 9186 series FO fieldbus isolating repeater transmits PROFIBUS DP and Modbus RTU signals over distances of up to 1.2 mi / 2 km as part of redundant fiber optic network structures. Standard plug connectors can be connected to the inherently safe optical interfaces "Ex op is". The diagnostic functions detect critical signal conditions early and report them to the control room.

Technical Data

Explosion Protection	
Application range (Zones)	2
Ex interface zone	2 22
IECEX gas certificate	IECEX BVS 13.0107 X
IECEX gas explosion protection	Ex nA nC [op is T6 Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 13.0107 X
IECEX dust explosion protection	[Ex op is Da] IIIC
ATEX gas certificate	BVS 07 ATEX 068 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex nA nC [op is T6 Ga] IIC T4 Gc
ATEX dust certificate	BVS 07 ATEX 068 X
ATEX dust explosion protection	⊕ II (1) D [Ex op is Da] IIIC
cULus certificate	E81680
Marking cULus	Class I, Zone 2, AEx/Ex nC Group IIC
Certificates	ATEX (BVS), Brazil (ULB), Canada (UL), IECEX (BVS), USA (UL)
Ship approval	CCS, EU RO MR (DNV)
Installation	Cl. I, Div. 2; Cl. I, Zone 2; Zone 2 or safe area
Electrical Data	
LFD relay	Yes
Protocols	HART over RS485 Modbus RTU PROFIBUS DP ServiceBus R.STAHL (IS1+)
Interface data rate, field side	9.6 kbps ... 1.5 Mbps
Data transmission display	green TD and RD
Electrical interface data rate	9.6 kbps – 1.5 Mbps
Electric interface version	RS 485
Electric interface connection	Sub-D socket X1, 9-pole

Electrical Data

Protocols optical interface	Protocol-transparent with RS-485 interface
Redundancy optical interface	Automatic changeover in the event of a line fault
Network structure	Line Ring Point-to-point
Optical interface connection	ST®, BFOC/2.5 socket
Optical interface transmission distance	≤ 2000 m
Error control	Power supply failure: Fault-contact is open Transmission level is good: LED green and yellow "FO signal", fault-contact is closed. Transmission level reduced (-1,5 dBm): LED yellow "FO ERR", fault-contact is open. Fiber breakage or transmission level is too low (-3 dBm): LED red "FO ERR", fault-contact is open.
FO wavelength	850 nm
Field side of interfaces	Fibre optics Ex opis
Compatibility	Compatible with series 9186

<p>Connection diagram 9186/15</p>		<table border="1"> <thead> <tr> <th>PIN</th> <th>RS 485</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>A-</td> </tr> <tr> <td>3</td> <td>B+</td> </tr> <tr> <td>6</td> <td>U+</td> </tr> <tr> <td>5</td> <td>GND</td> </tr> </tbody> </table>	PIN	RS 485	8	A-	3	B+	6	U+	5	GND
PIN	RS 485											
8	A-											
3	B+											
6	U+											
5	GND											

Auxiliary Power

Auxiliary power	24 V DC
Nominal voltage V_{nom}	24 V DC
Auxiliary power voltage range	18 to 31.2 V
Voltage range residual ripple	≤ 3,6 V_{SS}
Nominal current	130 mA
Power consumption	3 W
Polarity reversal protection	Yes
Operation indication	Green "PWR" LED

Output

Fault message contact switching capacity	max. 60 V DC; 42 V AC; 0,46 A
--	-------------------------------

Ambient Conditions

Ambient temperature °C	-20 °C ... +60 °C
Ambient temperature °F	-4°F ... +140°F
Storage temperature °C	-40°C ... +85°C
Storage temperature °F	-40°F ... +185°F
Max. relative humidity	95%
Use at the height of	< 2000 m
Note	Class II,III, Div. 2 and NEC® 506 Zone 22 applications are possible; contact factory


Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Connection cross-section	0.2 to 2.5 mm ² flexible 0.2 to 2.5 mm ² rigid 0.25 to 2.5 mm ² flexible with core end sleeve
Connection cross-section AWG	16 ... 12
Grid dimension	35.2 mm
Width	35.2 mm
Width, inches	1.38 in
Height	114.2 mm
Height, inches	4.49 in
Length	106 mm
Length, inches	4.17 in
Weight	244 g
Weight	0.54 lb

Mounting / Installation

Mounting orientation	Vertical Horizontal
Connection type	Screw terminal
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	2.5 mm ²
Min. flex conductor cross section	0.2 mm ²
Max. flex conductor cross section	2.5 mm ²
Connection cross-section AWG	24 – 14

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

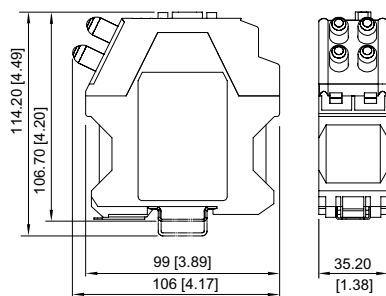

Type 9186/15

Accessories

Sub-D plug, RS-485

	<p>9-pin for connecting fieldbus or ServiceBus to CPU & power module Type 9440/15, 9185 fieldbusisolatingrepeater and 9786/15-12 media converter.</p> <p>The end-of-line resistor is installed and switchable. For non-intrinsically safe RS-485.</p> <p>Ambient temperature: -40 °C to +75 °C</p>	Art. No. 105715
--	--	---------------------------

Network and Wireless Solutions

FO fieldbus

ISpac

9186/15-12-11 Art. No. 160624



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.