

Isolators

Resistance isolator

Ex i field circuit ISpac

9180/10-77-11s Art. No. 160491



- 9180/.0 Ex i resistance isolator for Pt100 or 9180/.1 for Pt1000
- Only two-channel device in the world to require just 8.8 mm of space per channel
- For 2-, 3-, 4-wire connection

MY R. STAHL 9180A



The Series 9180 Ex i resistance isolators are used for the intrinsically safe operation of Pt100 (9180/.0) or Pt1000 (9180/.1) resistance temperature detectors. The resistance measured at the input is transmitted to the output and can thereby be measured by an I/O card. The auxiliary power, output and intrinsically safe input are galvanically separated.

Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX BVS 10.0055 X
IECEX gas explosion protection	Ex ec nC [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 10.0055 X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	BVS 05 ATEX E 176 X
ATEX gas explosion protection	II 3 (1) G Ex ec nC [ia Ga] IIC T4 Gc
ATEX dust certificate	BVS 05 ATEX E 176 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, AEx/Ex nA nC Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx ia]/[Ex ia] IIC T4 at Ta = 70°C See Doc. 9180 6 031 001 1
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (BVS), India (PESO), Korea (KTL), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of conformity	ATEX (EUK), China (CCC)
Safety Data	
Max. voltage U_o	6.5 V
Max. current I_o	16.5 mA
Max. power P_o	27 mW
Max. permissible external capacity C_o for IIC	25 μ F

Safety Data

Max. permissible external inductance L_o for IIC	120 mH				
Max. permissible external capacity C_o for IIB	570 μ F				
Max. permissible external inductance L_o for IIB	450 mH				
Max. permissible external capacity C_o for IIIC	570 μ F				
Max. permissible external inductance L_o for IIIC	450 mH				
Internal capacitance	Negligible				
Internal inductance	Negligible				
Safety-related max. voltage	253 V				
Intrinsically safe limiting values inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o				
IIC	L_o [mH]	50 mH	5 mH	1 mH	0.200 mH
	C_o [μ F]	1.100 μ F	1.700 μ F	2.300 μ F	3.400 μ F
IIB	L_o [mH]	100 mH	20 mH	2 mH	0.500 mH
	C_o [μ F]	5.300 μ F	6.900 μ F	11 μ F	1.500 μ F
IIIC	L_o [mH]	100 mH	20 mH	2 mH	0.500 mH
	C_o [μ F]	5.300 μ F	6.900 μ F	11 μ F	1.500 μ F

Electrical Data

Number of channels	1
LFD relay	Yes
Measuring range	18 to 391 Ω

Auxiliary Power

Auxiliary power	24 V DC
Nominal voltage	24 V DC
Auxiliary power voltage range	18 ... 31.2 V
Voltage range residual ripple	$\leq 3,6 V_{ss}$
Nominal current	27 mA
Power consumption	0.65 W
Max. power dissipation	0.6 W
Polarity reversal protection	Yes
Undervoltage monitoring	Yes
Operation indication	Green "PWR" LED

Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i input to output	1.5 kV AC
Ex i input to auxiliary power	1.5 kV AC
Ex i input to fault message contact	1.5 kV AC
Test voltage as per standard	EN 50178
Output to auxiliary power	350 V AC
Output to output	350 V AC
Fault message contact to auxiliary power	350 V AC
Fault message contact to output	350 V AC

Input

Sensor adjustment	DIP switch
Medium-resolution input	0.02 Ω
Input for resistance temperature detector	Pt 100
Connection type RTD input	2-, 3- and 4-wire circuits
2-conductor adjustment	Via ADJ DIP switch
Sensor current RTD	≤ 0.25 mA
Max. line resistance per wire RTD	50 Ω (2-wire connection) 100 Ω (3-, 4-wire connection)

Output

Output signal	Equal to input signal (resistance value)
Connection type RTD output	2-, 3- and 4-wire circuits
Settling time output	< 10 ms
Response time output	< 1 s
Sensor current range	200 μ A ... 5 mA
LF switch user adjustment	Activated/deactivated
Wire breakage error detection input	> 394 ohm
Short circuit error detection input	< 16 ohm
Behaviour of the output at line fault	> 10 k Ω
Line fault indication	Red "LF" LED
Fault message contact switching capacity	30 V / 100 mA
Line fault and loss of power signalisation	- Contact (30 V/100 mA), closed against earth in case of error - pac-Bus, potential-free contact (30 V/100 mA)
Deviations / error note	Information in % of the measuring range (20 mA) at U_N , 23 $^{\circ}$ C
Average measurement fault	< 0,1%
Temperature influence	$\leq 0,1$ %/10K

Ambient Conditions

Ambient temperature	-20 $^{\circ}$ C ... +70 $^{\circ}$ C (Single device) -20 $^{\circ}$ C ... +60 $^{\circ}$ C (Group assembly)
Ambient temperature	-4 $^{\circ}$ F ... +158 $^{\circ}$ F (Single device) -4 $^{\circ}$ F ... +140 $^{\circ}$ F (Group assembly)
Note	Installation conditions influence the ambient temperature. Please observe the "Cabinet installation guide".
Storage temperature	-40 $^{\circ}$ C ... +80 $^{\circ}$ C
Storage temperature	-40 $^{\circ}$ F ... +176 $^{\circ}$ F
Maximum relative humidity	95%
Max. additional relative humidity	No condensation
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21

Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide


Mechanical Data

Connection cross-section	0.2 to 2.5 mm² flexible 0.25 to 2.5 mm² flexible with core end sleeve 0.2 to 2.5 mm² rigid
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Length	108 mm
Length in inches	4.25 in
Mounting depth in inches	4.51 in
Weight	160 g
Weight	0.35 lb


Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Horizontal Vertical
Connection type	Screw terminal
Min. rigid conductor cross section	0.2 mm²
Max. rigid conductor cross section	2.5 mm²
Min. flex conductor cross section	0.2 mm²
Max. flex conductor cross section	2.5 mm²
Connection cross-section AWG	24 ... 14


Technical Drawings – Subject to Alterations

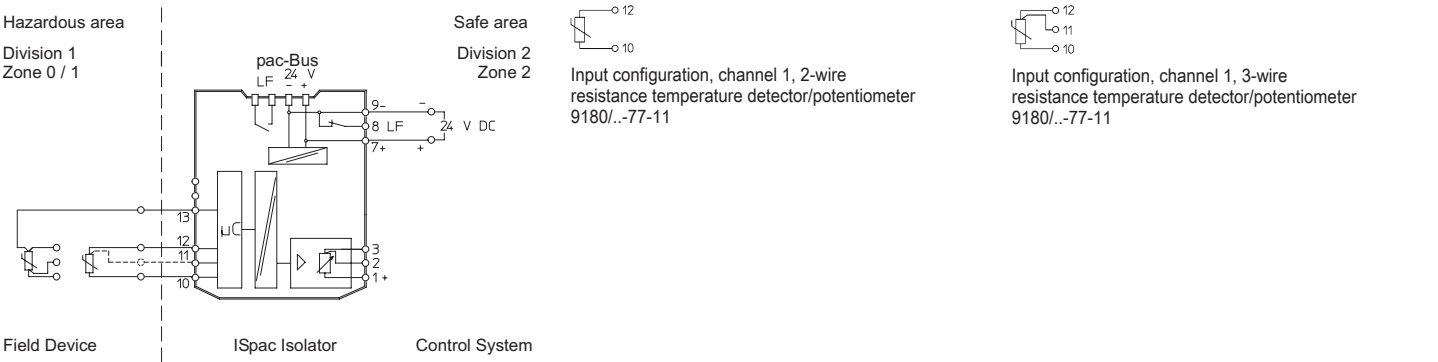

9180/1.-77-11 connection diagram

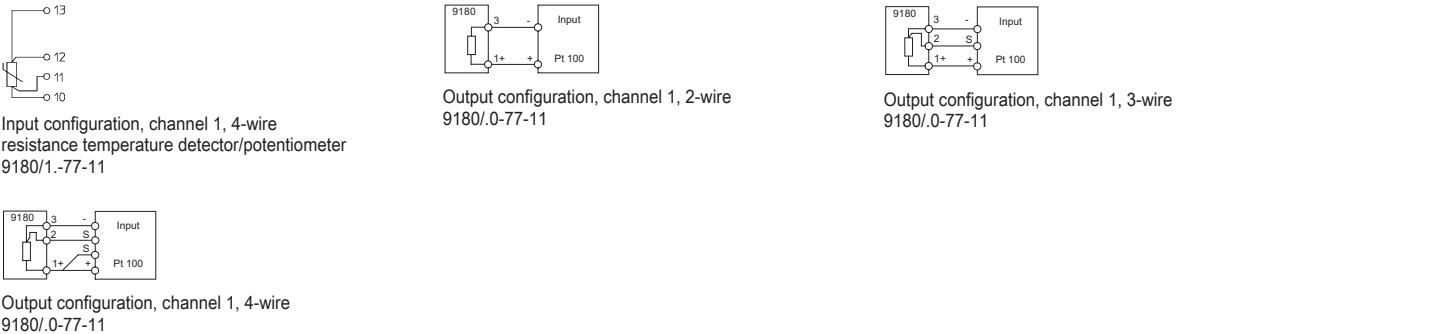

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

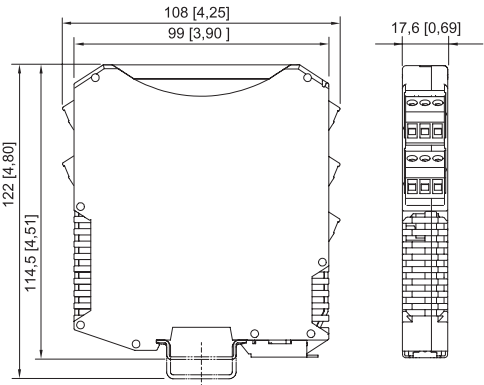

ISpac Series 9143, 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

Accessories

Transparent cover		Art. No.
	For 91xx ISpac modules Yellow, transparent Clear identification of the device for SIL applications. (Packaging unit: 10 pieces)	200914

Spare Parts

Screw terminal		Art. No.
	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: black	112816
	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: blue	112818
	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: green	112817
Screw terminal with test tap		Art. No.
	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: blue	113004
	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: black	113005

Isolators

Resistance isolator

Ex i field circuit ISpac

9180/10-77-11s Art. No. 160491



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.