

6149/2-2511-5010 Art. No. 273991



- Long-life, energy-saving, midpower LEDs embody design innovation
- For 110 to 240 V AC/DC, 24 to 48 V AC/DC or 12 V DC
- Standard version with diffuser for reduced glare and H07-RNF connection line, 2 x 1.5 mm<sup>2</sup>
- Further connection lines and connectors available as options

MY R. STAHL 6149B



The 6149 inspection light is a versatile light that allows you to see into every corner. This is all down to its state-of-the-art LED technology, coupled with its long-life electronics, which have been developed in-house by R. STAHL and exhibit high energy efficiency and superior illuminance. The innovative design of the enclosure makes the light extremely slim and lightweight. Its lockable suspension hooks and practical anti-roll protection make it ideal for use in the workshop.

### Technical Data

#### Explosion Protection

Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 07.0018
IECEX gas explosion protection	Ex d IIC T4 Gb
IECEX dust certificate	IECEX PTB 07.0018
IECEX dust explosion protection	Ex tb IIIC T100 °C Db
ATEX gas certificate	PTB 07 ATEX 1009
ATEX gas explosion protection	Ⓔ II 2 G Ex d IIC T4 Gb
ATEX dust certificate	PTB 07 ATEX 1009
ATEX dust explosion protection	Ⓔ II 2 D Ex tb IIIC T100 °C Db
Certificates and approvals	ATEX IECEX
Certificates	ATEX (PTB), IECEX (PTB)
Declaration of conformity	ATEX (EGK)

#### Electrical Data

Rated operational voltage DC	12 V
------------------------------	------

#### Lighting Data

Number of lamps	1
Lamp wattage	13 W
Lamp	Single-row LED
Light colour	Neutral white
Light distribution	with diffuser
Luminaire efficacy	104 lm/W
Luminous flux	1396 lm
Colour rendering	≥ 80
Colour temperature	5000 K

6149/2-2511-5010 Art. No. 273991

### Ambient Conditions

Ambient temperature -40 °C ... +40 °C

### Mechanical Data

Version Standard

Degree of protection (IP) IP66 / IP67

Class III

Enclosure material Aluminium

Silicone-free content Silicone-free

Pipe material Polycarbonate

Max. finely stranded connection terminals 1.5 mm<sup>2</sup>

Type of connection cable H07RN-F 2x1.5 mm<sup>2</sup>

Cable length 5 m

Size 1

Width 52 mm

Height 52 mm

Length 595 mm

Diameter 52 mm

Weight 1.66 kg

Weight 3.65 lb

### Components


Plug without

Ballast LED, CSS

Cable glands and entries 1 CMP-20s-A2F cable entry

Wire guard No

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

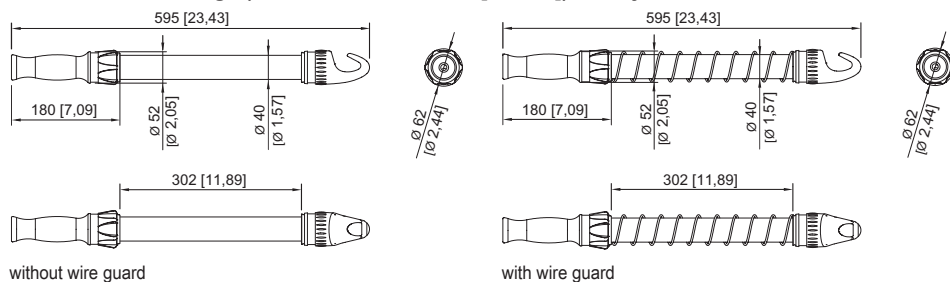

### Accessories

#### Mounting bracket



Mounting bracket made from galvanised sheet steel (x 2 units); for design size 1

Art. No.

120535

#### Mounting bracket and magnet







Mounting bracket made from galvanised sheet steel with magnetic base (x 2 units); for design size 1


Art. No.

120536

6149/2-2511-5010 Art. No. 273991

Plug		Art. No.
	8570/12-304-S-XX-X-XX-XXX 3-pole plug, 100 to 130 V AC, 50/60 Hz, 16 A	272896
	8570/12-306-S-XX-X-XX-XXX 3-pole plug, 200 to 250 V AC, 50 / 60 Hz, 16 A	272898
	8573/12-200 2-pole, 20 to 25 V, 50 / 60 Hz, 16 A	243197
	8573/12-210 2-pole, 20 to 25 V, DC, 16 A	243203
	8573/12-300 3-pole, 20 to 25 V, 50 / 60 Hz, 16 A	243190
	8573/12-312 3-pole, 40 to 50 V, 50 / 60 Hz, 16 A	243195

## Spare Parts

Wire guard		Art. No.
	Stainless steel protective cage For additional mechanical protection	120509

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.